

RQA

Ceramic Encased Wire Wound Resistors



GENERAL SPECIFICATIONS

Model	Wattage Rating	Resistance Range(Ω)			Resistance Tolerance
		Glass Fiber Core (GC)	Ceramic Core (CC)	Metal Oxide Film (MO)	
RQA 02	2W	0.1~200	0.1~500	10~13K	R \leq 1 Ω : \pm 10% R>1 Ω : \pm 5%
RQA 03	3W	0.1~300	0.1~1.0K	10~22K	
RQA 05	5W	0.1~500	0.1~3.0K	10~27K	
RQA 07	7W	0.2~1.0K	0.3~5.0K	10~56K	
RQA 10	10W	0.5~1.5K	0.3~10K	10~75K	
RQA 15	15W	1.0~1.5K	0.5~12K	10~100K	
RQA 20	20W	1.0~2.0K	0.5~15K	10~100K	


CHARACTERISTICS

Values in [] mean change in Ω after test


Temperature Range	-25 $^{\circ}$ C~155 $^{\circ}$ C	
Insulation Resistance	DC500V, 20M Ω Minimum	
Dielectric Withstanding Voltage	AC 1500V for 1minute	
Temp. Coefficient	Less than 1 Ω :490~1300ppm/ $^{\circ}$ C. More than 1 Ω :490ppm/ $^{\circ}$ C	
Short Time Overload	Δ R \pm [2%+0.05 Ω]	10 Times rated power for 5 sec.
Moisture Resistance	Δ R \pm [3%+0.05 Ω]	DC 100V, 40 $^{\circ}$ C 95% RH, 500h
Thermal Shock	Δ R \pm [2%+0.05 Ω]	Power Rating 30 min., -25 $^{\circ}$ C 15min.
Moisture Load Life	Δ R \pm [3%+0.05 Ω]	40 $^{\circ}$ C 95% RH, 10% Power Rating 90min.-ON
Load Life	Δ R \pm [5%+0.05 Ω]	Power Rating 90min.-ON, 30min.-OFF
Solderability	75% Coverage minimum	

Note : Applied voltage : AC RMS voltage

DERATING CURVE

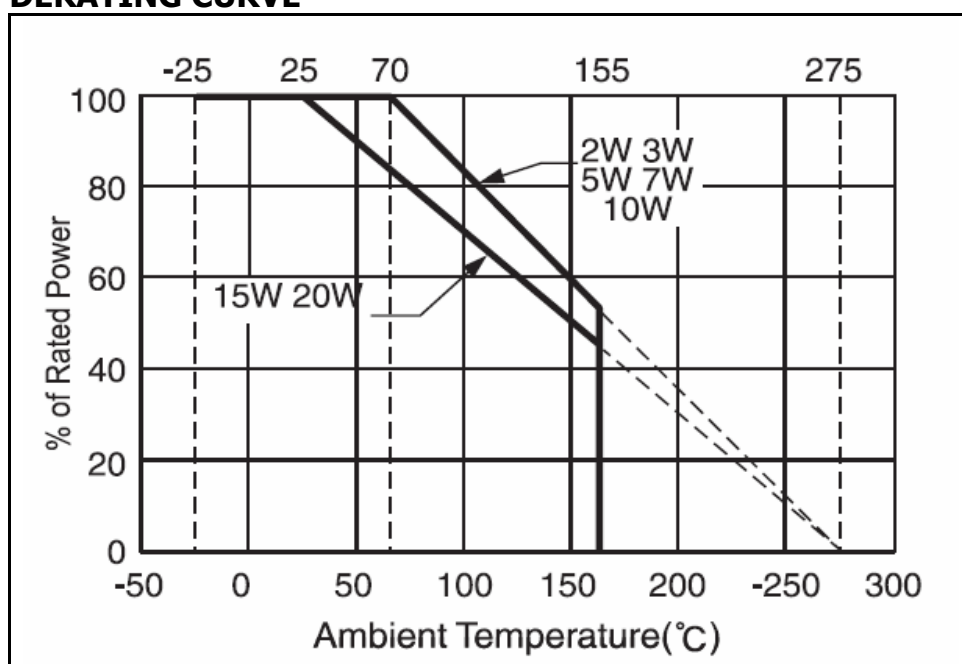

SURFACE TEMPERATURE INCREASE VERSUS POWER LOAD

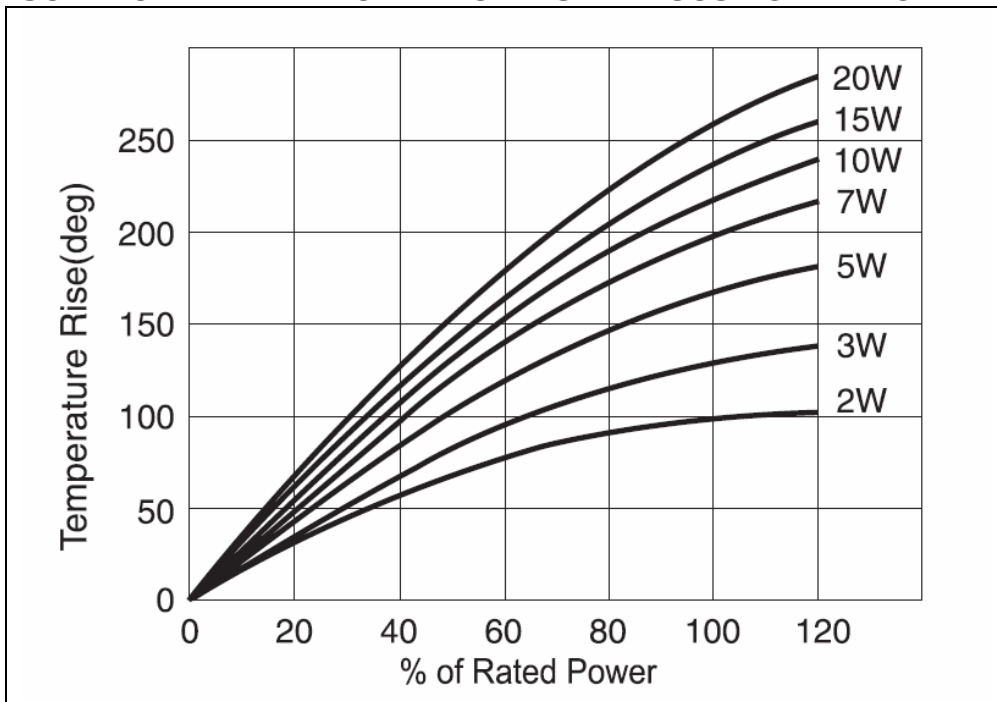

DIMENSIONS

Power Rating(W)	Dimensions(mm)			
	L	W	H	d±0.1
2	17.5+1.2	6.4+1.0	6.4+1.0	0.8
3	22+1.5	8.0+1.0	8.0+1.0	0.8
5	22+1.5	9.5+1.0	9.0+1.0	0.8
7	35+1.5	9.5+1.0	9.0+1.0	0.8
10	48+1.5	9.5+1.0	9.0+1.0	0.8
15	48+1.5	12.5+1.2	12.5+1.2	0.8
20	63.5+2.0	12.5+1.2	12.5+1.2	0.8

The drawing shows a component with a central rectangular body of length L and height H. It has two leads of length 35 extending from the ends. The diameter of the leads is d. A cross-section shows the width W and height H.

ORDERING PROCEDURE EXAMPLE

